


Auto Magic

**TORNADO
MAGIC™ CLEANING TOOL**

Kit # TM-200

Contents: (a) One plastic cone.
(b) One weighted tube assembly.
(c) One plastic washer.

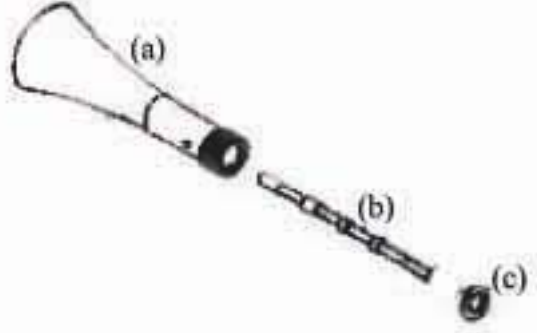

Step One:

Evaluate the condition of the cone and weighted tube assembly by doing a visual and touch inspection. When the tube has become grooved more than 1/16 of an inch, replace cone and washer.

Step Two:

Next rinse weighted tube assembly and compare the condition of the used tube to the new tube. It is not always necessary to replace the weighted tube assembly unless the weights are smooth or the tube has become damaged.

Replacement of Cone:

Remove used cone, clean threads on Tornado gun handle, replace washer, do not use thread tape when replacing cone. Rotate cone onto handle, do not over tighten.

Replacement of weighted tube assembly:

Remove weighted tube assembly using a **10 mm** boxed end wrench "ONLY". Check threading on gun handle for debris, clean out as necessary.

****NOTE**** Green colored guns may have excessive coating on threads inside handle. Because of this the replacement tube assembly MAY NOT thread all the way in. If the tube assembly extends past the cone, trim as needed.

Make sure plastic weights are positioned evenly on the tube, as seen above.

Carefully slide replacement tube over inner liquid tube, do not bend or crimp inner tube. Tighten weighted tube assembly, using a 10 mm boxed end wrench. Install plastic washer and cone.

CAUTION !!

Using pliers or channel lock vise grips may damage the handle and threads.

*****NOTE*****

Do not attempt to remove or replace liquid inner tube. This tube is permanently installed by the factory.